



Arduino Uno

Dissolved Oxygen Sample Code

Revised 9/28/15

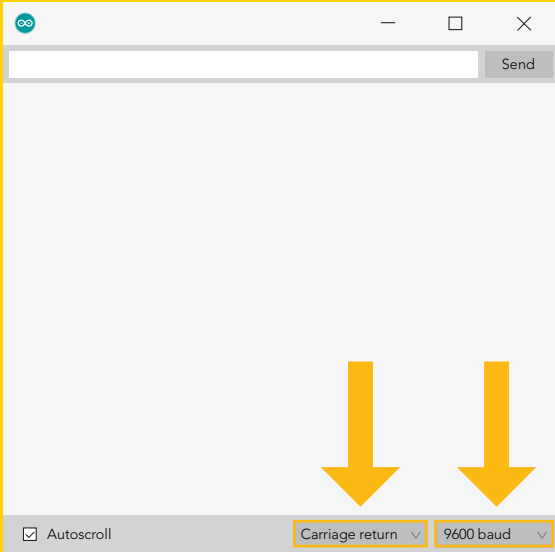

After flashing the Arduino with the code below, open the serial monitor and set it to append *carriage return* only and then set the baud rate to **9600**.

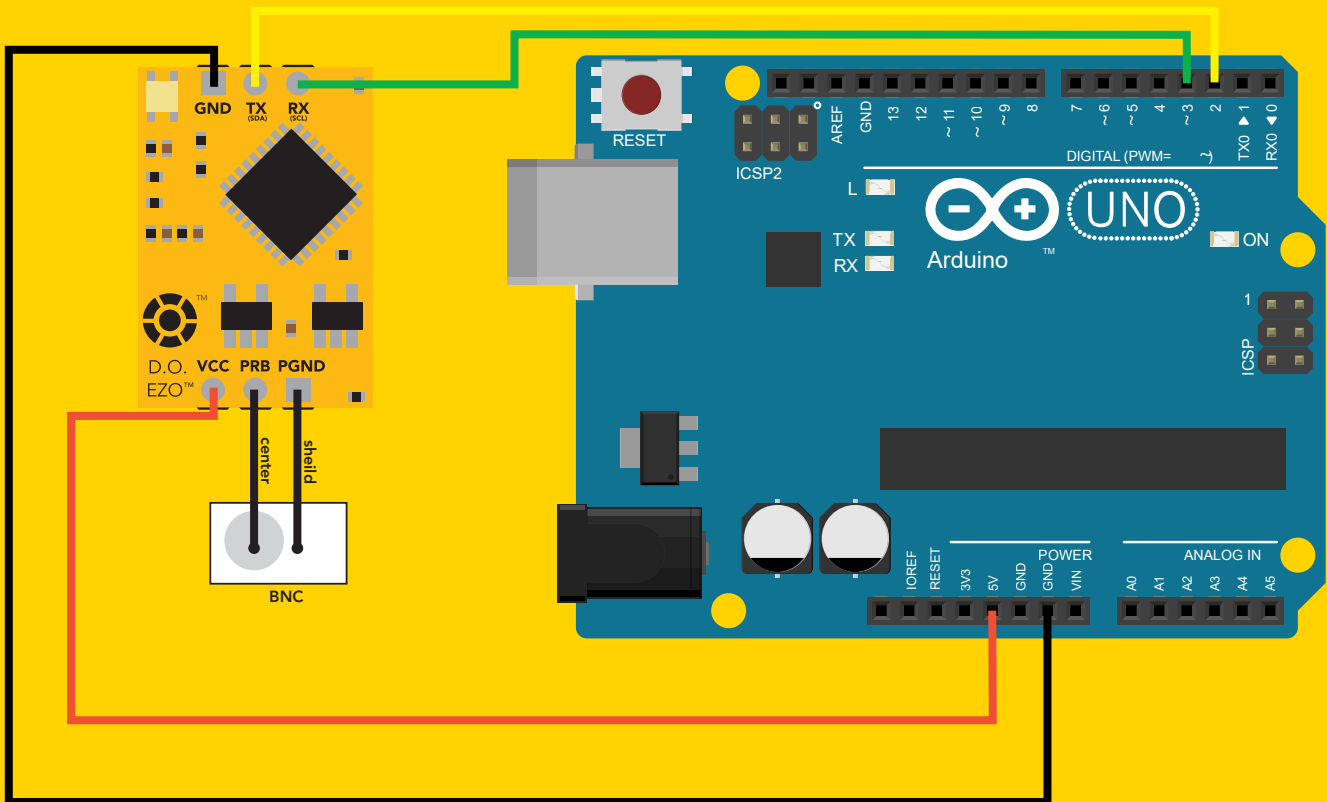

[Click here to download the sample code](#)